




# EKKO 026 BEAM SPEC SHEET

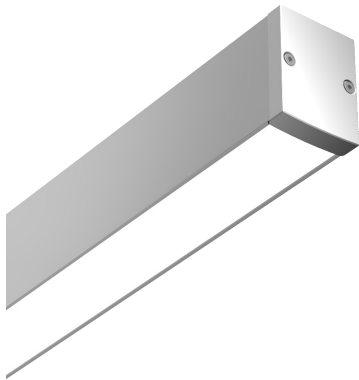

Project Name:
Specifier:
Location:
Product Code:



DIRECT	LEDoptek			
LED lumens/m	500	1000	1500	2250
Delivered Lumens/m <sup>1</sup>	320	640	960	1440
Standard CRI	>80			
<b>System W/m</b>				
2700K	4	8	13	21.7
3000K	4	7.9	12.5	21.7
3500K	4	7.6	12	20
4000K	4	7.7	12	19.6
<b>Other LED Options</b>	5000K · RGBW · tuneable white · cyanosis · high CRI 98 R9 > 80			
<b>Control (Remote)</b>	non dim · DALI · Casambi · 0-10V · DMX (RGBW only)			
<b>Optics</b>	LEDoptek - symmetrical			
<b>Finish</b>	white/black/silver powder coat standard · custom powder coat · clear anodised			
<b>Weight/Pack Size</b>	0.9kg/m - 70 x 70 x (l + 200mm)			
<b>Mounting</b>	wire suspended · rod suspended · surface mount bracket · wall mount bracket			
<b>Accessories</b>	mitred bends · T-joins			
<b>Luminaire Length</b>	any length over 500mm in 1mm increments with fully illuminated diffuser			

1. Lumens/m based on 4000K LED strip

EKK026BMD-LEDoptek-20201124-01

## Product Codes

 Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: **EKK0026BMD\_ \_ \_ \_30K500ANONON**

Fixture Type	Aperture Size	Form	Mounting	Nominal Length	Color	Output (lm/m)	Finish	Control	Bends
EKKO	026 26mm	BMD Beam Direct	SUR Surface		27K 2700K	500	ANO Clear Anodized	NON Non-Dim 0-10 0-10V Dim DALI DALI DMX RGB Only	BND If miters req'd, provide drawing
			CAB Cable Susp		30K 3000K		PCB Powdercoat Black		
			ROD Suspension Rod		35K 3500K		PCS Powdercoat Silver		
			WALL Wall-mount		40K 4000K		PCW Powdercoat White		
			REC Recessed Flush		TUN Tunable White		CUS Custom (consult factory)		
			RGB RGBW						
			CRI 98CRI R9>80						
CUS Custom (consult factory)									

1. Specify cable termination at mounting point

2. Specify mounting length

3. Rod terminates with XXX thread