




EKKO 026 BOX SPEC SHEET

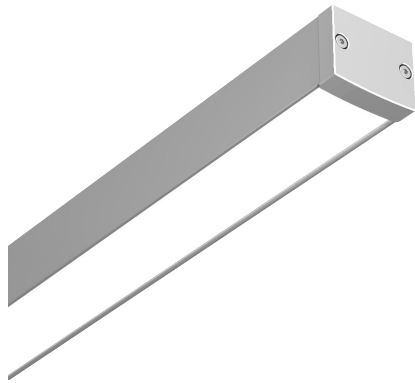

Project Name:
Specifier:
Location:
Product Code:



DIRECT	LEDoptek		
LED lumens/m	500	1000	1500
Delivered Lumens/m ¹	360	720	1080
Standard CRI	>80		
System W/m			
2700K	4	8	12.8
3000K	4	7.7	12.5
3500K	4	7.7	12
4000K	4	7.7	12
Other LED Options	5000K · tuneable white		
Control (Remote)	non dim · DALI · Casambi · 0-10V		
Optics	LEDoptek - symmetrical		
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised		
Weight/Pack Size	0.8kg/m - 70 x 70 x (L + 200mm)		
Mounting	wire suspended · rod suspended · surface mount bracket · wall mount bracket		
Accessories	mitred bends · T-joins		
Luminaire Length	any length over 500mm in 1mm increments with fully illuminated diffuser		

1. Lumens/m based on 4000K LED strip.

EKK026BXD-LEDoptek-20201124-01

Product Codes

Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: **EKK0026BXD___30K500ANONON**

Fixture Type	Aperture Size	Form	Mounting	Nominal Length	Color	Output (lm/m)	Finish	Control	Bends
EKKO	026 26mm	BXD Box Direct	SUR Surface		27K 2700K	500	ANO Clear Anodized	NON Non-Dim	BND If miters req'd, provide drawing
			CAB Cable Susp		30K 3000K		PCB Powdercoat Black		
			ROD Suspension Rod		35K 3500K		PCS Powdercoat Silver		
			WALL Wall-mount		40K 4000K		PCW Powdercoat White		
			TUN Tunable White		1000		CUS Custom (consult factory)		
						1500			

1. Specify cable termination at mounting point

2. Specify mounting length

3. Rod terminates with XXX thread