




EKKO 026 BOX SPEC SHEET

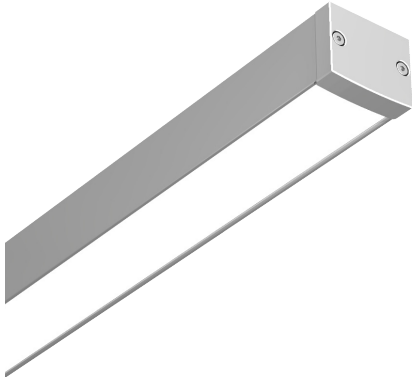

Project Name:
Specifer:
Location:
Product Code:



DIRECT	LEDoptek		
LED Lumens/m (L/f)	500 (152)	1000 (303)	1500 (455)
Delivered Lumens/m (L/f)	360 (109)	720 (218)	1080 (327)
Standard CRI	>80		
System W/m (W/f)			
2700K	4 (1.2)	8 (2.4)	12.8 (3.9)
3000K	4 (1.2)	7.7 (2.3)	12.5 (3.8)
3500K	4 (1.2)	7.7 (2.3)	12 (3.6)
4000K	4 (1.2)	7.7 (2.3)	12 (3.6)
Other LED Options	5000K · tuneable white		
Control (Remote)	non dim · DALI · Casambi · 0-10V		
Optics	LEDoptek - symmetrical		
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised		
Weight/Pack Size	0.8kg/m - 70 x 70 x (L + 200mm)		
Mounting	wire suspended · rod suspended · surface mount bracket · wall mount bracket		
Accessories	mitred bends · T-joins		
Luminaire Length	any length over 500mm in 1mm increments with fully illuminated diffuser		

1. Lumens/m based on 4000K LED strip.

EKK026BXD-LEDoptek-20201124-01

Product Codes

 Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: **EKK0026BXD___30K500ANONON**

Fixture Type	Aperture Size	Form	Mounting	Nominal Length	Color	Output (lm/m)	Finish	Control	Bends
EKKO	026 26mm	BXD Box Direct	SUR Surface		27K 2700K	500	ANO Clear Anodized	NON Non-Dim	BND If miters req'd, provide drawing
			CAB Cable Susp		30K 3000K		PCB Powdercoat Black		
			ROD Suspension Rod		35K 3500K		PCS Powdercoat Silver		
			WALL Wall-mount		40K 4000K		PCW Powdercoat White		
			TUN Tunable White		1500		CUS Custom (consult factory)		
			CUS Custom (consult factory)						

- Specify cable termination at mounting point
- Specify mounting length