




EKKO AKWA 026 BEAM

SPEC SHEET

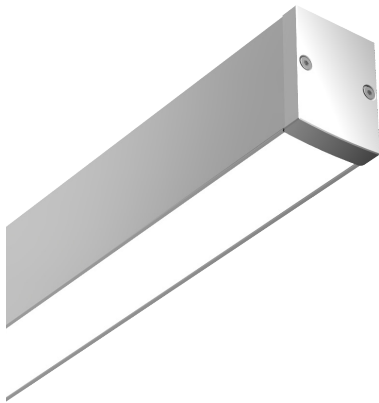

Project Name:
Specifier:
Location:
Product Code:



DIRECT	AKWA Resin Encapsulation			
LED lumens/m	500	1000	1500	2250
Delivered Lumens/m ^{1,2}	265	530	795	1193
Standard CRI	>80			
System W/m				
2700K	4	8	13	21.7
3000K	4	7.9	12.5	21.7
3500K	4	7.6	12	20
4000K	4	7.7	12	19.6
Other LED Options	RGBW · solid colours available upon request.			
Control (Remote)	non dim · DALI · 0-10V · DMX (RGBW only) ³			
Optics	AKWA- symmetrical			
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised			
Weight/Pack Size	1.2kg/m - 70 x 70 x (L + 200mm)			
Mounting	wire suspended · rod suspended · surface mount bracket · wall mount bracket			
Accessories	mitred bends · T-joins			
Luminaire Length	any length over 500mm in 1mm increments with fully illuminated diffuser			

1. Lumens/m based on 4000K LED strip.

2. Due to tolerances of the production process and the electrical components, values for light output, colour temperature and electrical power can vary up to 10%

3. DMX (to be located in suitable IP enclosure/location by others)

EKKAKW026BMD-LEDoptek-20201124-011

Product Codes

 Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: **AKWA026BXD**_____ **27K500ANDNON**

Fixture Type	Aperture Size		Form	Mounting	Nominal Length	Color	Output (lm/m)	Finish	Control	Bends			
AKWA	026	26mm	BMD	Beam Direct	SUR	Surface	500 1000 1500 2250	ANO	Clear Anodized	NON	Non-Dim	BND	If miters req'd, provide drawing
					CAB	Cable Susp		PCB	Powdercoat Black	0-10	0-10V Dim		
					ROD	Suspension Rod		PCS	Powdercoat Silver	DAL	DALI		
					WALL	Wall-mount		PCW	Powdercoat White	DMX	RGB Only		
					REC	Recessed Flush		CUS	Custom (consult factory)				
					RGB	RGBW							
CUS	Custom (consult factory)												

1. Specify cable termination at mounting point

2. Specify mounting length

3. Rod terminates with XXX thread