

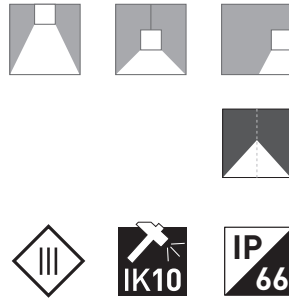


EKKO AKWA 026 BOX

SPEC SHEET

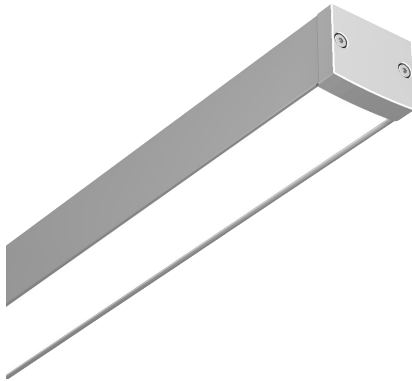

Project Name:
Specifier:
Location:
Product Code:



DIRECT	AKWA Resin Encapsulation		
LED lumens/m	500	1000	1500
Delivered Lumens/m ^{1,2}	285	570	855
Standard CRI	>80		
System W/m			
2700K	4	8	12.8
3000K	4	7.7	12.5
3500K	4	7.7	12
4000K	4	7.7	12
Other LED Options	solid colours available upon request.		
Control	non dim · DALI · 0-10V		
Optics	AKWA - symmetrical		
Finish	white/black/silver powder coat standard · custom powder coat · clear anodised		
Weight/Pack Size	1.0kg/m - 70 x 70 x (L + 200mm)		
Mounting	wire suspended · rod suspended · surface mount bracket · wall mount bracket		
Accessories	mitred bends · T-joins		
Luminaire Length	any length over 500mm in 1mm increments with fully illuminated diffuser		

1. Lumens/m based on 4000K LED strip

2. Due to tolerances of the production process and the electrical components, values for light output, colour temperature and electrical power can vary up to 10%.

EKKAKW026BXD-LEDoptek-20201124-01

Product Codes

 Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: **AKWA026BMD** 27K500ANONON

Fixture Type	Aperture Size		Form	Mounting		Nominal Length		Color		Output (lm/m)		Finish		Control		Bends	
AKWA	026	26mm	BXD	Box Direct	SUR	Surface	27K	2700K	500	ANO	Clear Anodized	NON	Non-Dim	BND	If miters req'd, provide drawing		
					CAB	Cable Susp	30K	3000K	1000	PCB	Powdercoat Black	0-10	0-10V Dim				
					ROD	Suspension Rod	35K	3500K	1500	PCS	Powdercoat Silver	DAL	DALI				
					WALL	Wall-mount	40K	4000K		PCW	Powdercoat White						
							CUS	Custom (consult factory)		CUS	Custom (consult factory)						

1. Specify cable termination at mounting point

2. Specify mounting length

3. Rod terminates with XXX thread