


## DATASHEET

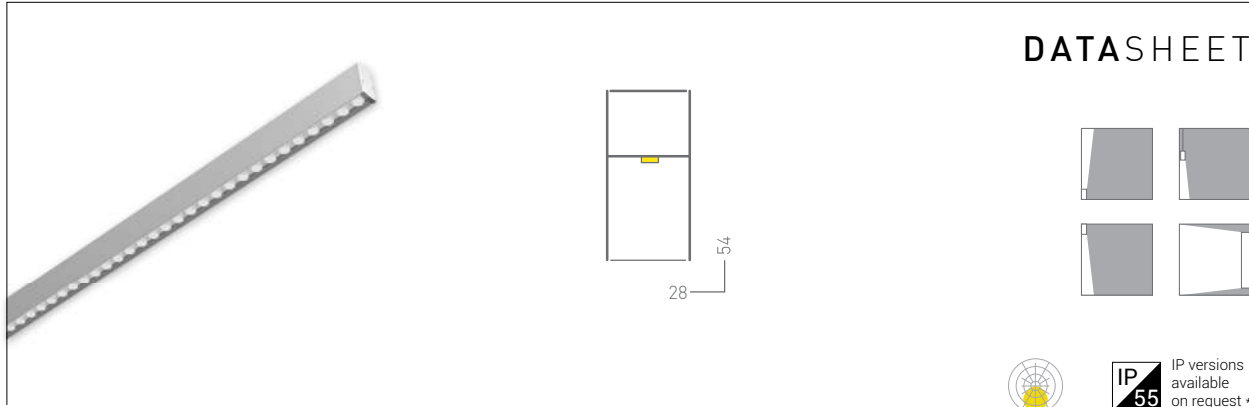

<b>Weight/Pack size</b>	1.2kg/m - 70 x 70 x (L + 200mm)
<b>Finish</b>	clear anodized · silver powder coat · white powder coat · custom color
<b>Mounting</b>	surface mount · suspended · bracket mount
<b>Accessories</b>	custom angled connectors · others available

\* All IP rated luminaires tested to AS60529-2004 Degrees of protection provided by enclosures (IP Code)

### KLIK LED<sup>+</sup> LEDSTREAM



#### DIRECT

Color	3000K			4000K		
	LED Lumen/m <sup>1</sup>	3000	4500	5800	3000	4500
Standard CRI (Ra)	>80	>80	>80	>80	>80	>80
LED Watts/m	24	37	47	24	37	47
<b>Control</b>	Non Dim · DALI · 0-10 (USA only)					
<b>Optics</b>	Lensed · 20° · 40° · 20° x 40° spreader					
<b>Luminaire Length</b>	Custom lengths in 50mm (Nominal) increments with fully illuminated diffuser					
<b>LEDS</b>	Cree					

1. Other colors available on request

LED-FOCUS-20171108-01

