
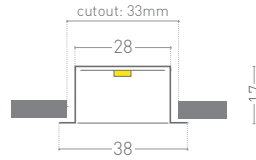


KLIK USA LEDstream Eco 16 Recessed Patented

DATASHEET

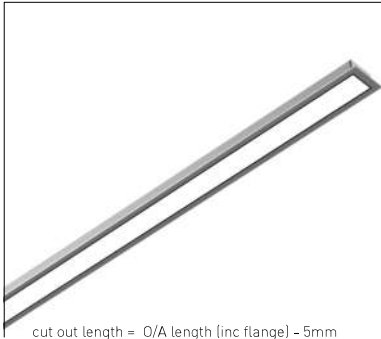

cut out length = O/A length (inc flange) - 5mm

Weight/Pack size	0.75kg/m - 70 x 70 x (l + 200mm)
Finish	clear anodized · silver powder coat · white powder coat · custom color
Mounting	recessed bracket mount · plasterboard clipmount



DIRECT	3000K			4000K		
Color²	3000K			4000K		
LED Lumen/m¹	500	1000	1500	500	1000	1500
Standard CRI (Ra)³	>80	>80	>80	>80	>80	>80
LED Watts/m	4	8	11	4	8	11
Control	Non Dim · DALI · 0-10V			(remote to luminaire - Does not fit through cut-out)		
Optics	LEDoptek					
Luminaire Length	Custom lengths in 100mm increments with fully illuminated diffuser; 2.8m max length; End Plates 14mm					
LEDs	Cree · LG Innotek · Nichia · Philips Lumileds					

1. All values shown are LED lumens and watts, see photometric files for system lumens and watts. 2. 2700K - 5000K available on request.
 3. LM-79 and TM-21 lifetime projection test reports available on request.

LED-H-20171016-01

