



## DATASHEET



cut out length = O/A length (inc flange) - 5mm

<b>Weight/Pack size</b>	0.85kg/m - 70 x 70 x (l + 200mm)
<b>Finish</b>	clear anodized · silver powder coat · white powder coat · custom color
<b>Mounting</b>	recessed bracket mount · plasterboard clipmount
<b>Accessories</b>	custom angled connectors · RGB & RGB/W color changing leds · others available

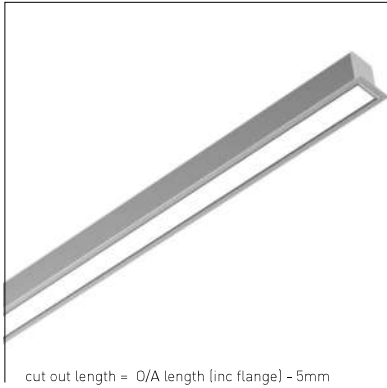

DIRECT	3000K				4000K				RGBW - 3000K				RGBW - 4000K			
Color <sup>2</sup>									RGB <sup>3</sup>	White	White	White	RGB <sup>3</sup>	White	White	White
<b>LED Lumen/m<sup>1</sup></b>	500	1000 <sup>4</sup>	1500	2250	500	1000 <sup>4</sup>	1500	2250	500	1000	1500	2250	500	1000	1500	2250
<b>Standard CRI (Ra)<sup>5</sup></b>	>80	>80	>80	>80	>80	>80	>80	>80		>80	>80	>80		>80	>80	>80
<b>LED Watts/m</b>	4	8	11	18 <sup>5</sup>	4	8	11	17 <sup>5</sup>	15	8	11	18	15	8	11	17
<b>High CRI (Ra)<sup>6</sup></b>	98	98	98		98	98	98									
<b>CRI R9 (R9)</b>	80	80	80		80	80	80									
<b>LED Watts/m</b>	6	11	16		5	10	15									
<b>Control</b>	Non Dim · DALI · 0-10V · DMX (DMX = RGBW only)												[remote to luminaire - Does not fit through cut-out]			
<b>Optics</b>	LEDoptek															
<b>Luminaire Length</b>	Custom lengths in 1mm increments with fully illuminated diffuser; max 2.8m in single unit															
<b>LEDS</b>	Cree · LG Innotek · Nichia · Philips Lumileds															

1. All values shown are LED lumens and watts, see photometric files for system lumens and watts. 2. 2700K - 5000K available on request. 3. Lumen/m are calculated when all three colors are at maximum output. 4. Solid colors available upon request - Amber, Blue, Red & Green. 5. LM-79 and TM-21 lifetime projection test reports available on request.

6. CRI tolerance = +1% -3%.

LED-G1-20171024-01