



MISTIK 028 CYL SPEC SHEET

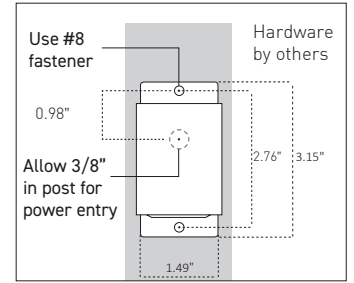

POST DIAMETER
Ø38 · Ø42 · Ø48

DIAMETER
Ø44



| Optics | | | Reflector | |
|-----------------------|--|-----|----------------------------|--------------|
| Beam Angle | | | symmetrical | asymmetrical |
| lm | W | mA | System Lumens ¹ | |
| 165 | 1.4 | 350 | 126 | 123 |
| 235 | 2 | 500 | 179 | 174 |
| 284 | 2.5 | 700 | 216 | 211 |
| Colour | 2200K · 2700K · 3000K · 4000K · 5000K · Red · Green · Blue · Amber · PC Amber | | | |
| CRI | 80-85 | | | |
| Binning | 2 McAdam Step | | | |
| Fixture Driver | Output 350 - 700mA Constant Current (Provided with fixture based on selected wattage; Compatible with KLIK 24VDC power supply) | | | |
| Control | 0-10V · DMX* · DALI | | | |
| Mounting | By others · 0.26in hole provided top and bottom for surface mounting | | | |
| Distribution | symmetric · asymetric · soft symmetric · soft asymmetric · frost symmetric · frost asymmetric | | | |
| Weight | 0.1lbs | | | |

* DMX control is for overall dimming only and not for individually addressed LEDpods
1 Lumen output based on 4000K

MTK028KAPSD 20200904

Product Codes Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: **LPMISTIK028CYL30KA2.0WFLD**

| Fixture Type | Color ¹ | Distribution | Wattage | Lens ^{2,4} | Mounting | Custom Bezel ^{3,4,5} |
|--------------|---|---|--|---|---|---|
| 0.□ | 2&K 3300K 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K AMB Amber PCA Phosphor-Converted Amber | A Asymmetric S Symmetric | <input type="checkbox"/> 1.4 Watts <input type="checkbox"/> 2.0 Watts <input type="checkbox"/> 2.5 Watts | FL Clear Flood (Standard) FR Frosted SF Light Filter | FD Flat Surface P38 1.5" OD post P42 1.66" OD post P48 1.90" OD post | DUL DULUX Colors (request color guide) RAL RAL # |

- Other colors on request.
- Clear FLD (Flood lens standard; FRS is heavy opaque; SFT is light filter).
- Specify RAL# (additional charge)
- Additional charges and lead time apply for this feature.**
- Colored anodized bezel available, contact factory

