



EKKO AKWAFIL 026 BOX

SPEC SHEET

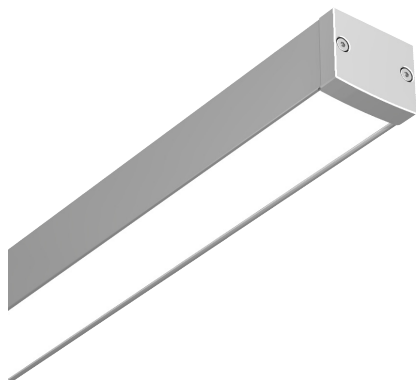

Project Name:
Specifier:
Location:
Product Code:



DIRECT	AKWA Resin Encapsulation		
LED lumens/m (L/f)	500 (152)	1000 (303)	1500 (455)
Delivered Lumens/m (L/f)	285 (86)	570 (173)	855 (259)
Standard CRI	>80		
System W/m (W/f)			
2700K	4 (1.2)	8 (2.4)	12.8 (3.9)
3000K	4 (1.2)	7.7 (2.3)	12.5 (3.8)
3500K	4 (1.2)	7.7 (2.3)	12 (3.6)
4000K	4 (1.2)	7.7 (2.3)	12 (3.6)
Other LED Options	solid colors available upon request.		
Control	non dim · DALI · 0-10V		
Optics	AKWA - symmetrical		
Finish	white/black/silver powder coat standard · custom powder coat · clear anodized		
Weight/Pack Size	1.0kg/m - 70 x 70 x (l + 200mm)		
Mounting	wire suspended · rod suspended · surface mount bracket · wall mount bracket		
Accessories	mitred bends · T-joins		
Luminaire Length	any length over 500mm in 1mm increments with fully illuminated diffuser		

1. Lumens/m based on 4000K LED strip

2. Due to tolerances of the production process and the electrical components, values for light output, colour temperature and electrical power can vary up to 10%.

EKKAKW026BXD-LEDOptek-20201124-01

Product Codes

Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: **AKFL026BXD** **27K500ANONON**

Fixture Type	Aperture Size	Form	Mounting	Nominal Length (in mm)	Color	Output (lm/m)	Finish	Control	Bends
AKFL	026 26mm	BXD Box Direct	SUR Surface		27K 2700K	500	ANO Clear Anodized	NON 0-10V Dim DALI	BND If miters req'd, provide drawing
			CAB Cable Susp		30K 3000K		PCB Powdercoat Black		
			ROD Suspension Rod		35K 3500K		PCS Powdercoat Silver		
			WALL Wall-mount		40K 4000K		PCW Powdercoat White		
					CUS Custom (consult factory)		CUS Custom (consult factory)		

1. Specify cable termination at mounting point

2. Specify mounting length

