




# EKKO 026 BOX SPEC SHEET

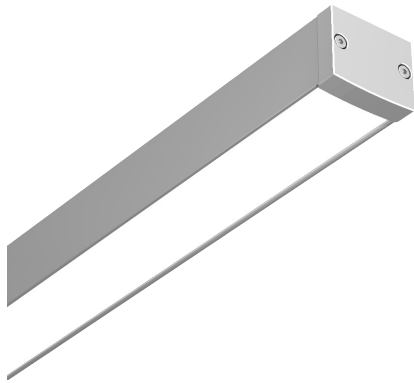

Project Name:
Specifier:
Location:
Product Code:



DIRECT	LEDoptek		
LED Lumens/m (L/f)	500 (152)	1000 (303)	1500 (455)
Delivered Lumens/m (L/f)	360 (109)	720 (218)	1080 (327)
Standard CRI	>80		
System W/m (W/f)			
2700K	4 (1.2)	8 (2.4)	12.8 (3.9)
3000K	4 (1.2)	7.7 (2.3)	12.5 (3.8)
3500K	4 (1.2)	7.7 (2.3)	12 (3.6)
4000K	4 (1.2)	7.7 (2.3)	12 (3.6)
Other LED Options	5000K · tuneable white		
Control (Remote)	non dim · DALI · Casambi · 0-10V		
Optics	LEDoptek - symmetrical		
Finish	white/black/silver powder coat standard · custom powder coat · clear anodized		
Weight/Pack Size	0.8kg/m - 70 x 70 x (l + 200mm)		
Mounting	wire suspended · rod suspended · surface mount bracket · wall mount bracket		
Accessories	mitred bends · T-joins		
Luminaire Length	any length over 500mm in 1mm increments with fully illuminated diffuser		

1. Lumens/m based on 4000K LED strip.

EKK026BXD-LEDoptek-20201124-01

## Product Codes

Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: **EKK0026BXD\_30K500ANONON**

Fixture Type	Aperture Size	Form	Mounting	Nominal Length	Color	Output (lm/m)	Finish	Control	Bends
EKKO	026 26mm	BXD Box Direct	SUR Surface CAB Cable Susp ROD Suspension Rod WALL Wall-mount		27K 2700K 30K 3000K 35K 3500K 40K 4000K TUN Tunable White CUS Custom (consult factory)	500 1000 1500	ANO Clear Anodized PCB Powdercoat Black PCS Powdercoat Silver PCW Powdercoat White CUS Custom (consult factory)	NON Non-Dim 0-10 0-10V Dim DAL DALI	BND If miters req'd, provide drawing

1. Specify cable termination at mounting point

2. Specify mounting length

