

Project Name:

Location:


Specifier:

Rep Agency:

Fixture Type:

Product Code:

KLIK LEDpod™ XL25 Patented

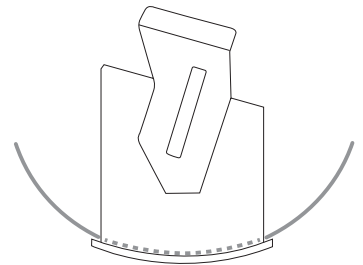

KLIKLED® LEDpod

Optics			Lens/Reflector	
Beam Angle			Symmetrical	Asymmetrical
lm	W	mA	System Lumens ¹	
165	1.4	350	120	104
235	2.0	500	171	148

Colour	2200°K · 2700K · 3000K · 4000K · 5000K · Red · Green · Blue · Amber · PC Amber
CRI	80-85
Binning	2 McAdam Step
Driver	Input 24VDC
Control	DALI · 1-10V · DMX*
Distribution	Symmetrical · Asymmetrical
Tube Size	Ø48 - Ø100mm, Max. wall 7.0mm + Flat RHS [†]
Cut out	Ø25mm
Weight	0.035kg

* DMX control is for overall dimming only and not for individually addressed LEDpods

LPDXL25 USA 20220125

[†] Others sizes available upon request

¹ Lumen output based on 4000K

• Patented

Product Codes

Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: **LPXL25F0027K1.4AFLD**

Fixture Type	Size	Color	Wattage	Distribution	Optic	Lens ^{1,2}	Custom Bezel ^{1,2}	Custom Wall ¹
LPXL LEDpod XL	25 Fits 1-1/8" Hole	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K RED Red GRN Green BLU Blue AMB Amber PCA PC Amber	1.4 1.4 Watts 2.0 2.0 Watts	A Asymmetric S Symmetric	FLD Flood	Clear lens standard FRS Frosted	DUL DULUX Colors (request color guide) ANO Anodize SPC Standard Powdercoat SHR Diode shroud for horizontal mount	.25 For 1/4" Wall Thickness

1. Additional charges and lead time apply for this feature.

2. Anodized bezel available, contact factory