




Quality Products. Service Excellence.

Type 4X Stainless Steel Wallmount Enclosure *1418 N4 SS Series* Continuous Hinge Door with Clamps



Application

- Designed for use as instrument enclosures, electric, hydraulic or pneumatic control housings, electrical junction boxes or terminal wiring enclosures.
- Provides protection where equipment may be hosed down or otherwise be very wet, or in specific applications where corrosion is a serious problem.

Standards

- UL 508A Type 3R, 4, 4X, and 12
- CSA Type 3R, 4, 4X, and 12
- Complies with
 - NEMA Type 3R, 4, 4X, 12 and 13
 - JIC EGP-1-1967 unless marked¹
 - IEC 60529, IP66

Construction

- Formed 14 gauge 304 or 316 stainless steel.
- Smooth, continuously welded seams without knockouts, cutouts or holes.
- Door stiffeners are provided in the larger enclosures for extra rigidity.
- Welded brackets provide for enclosure mounting.
- Formed lip on door and enclosure excludes flowing liquids and contaminants.
- Stainless steel continuous hinge on door may be removed by pulling the stainless steel hinge pin.
- Door is secured with easily operated stainless steel clamps.
- Provision for padlocking.
- Seamless poured-in place gasket.
- A removable 12 gauge inner panel is included.
- Collar studs are provided for mounting inner panels.
- A bonding stud is provided on the door and a grounding stud is provided in the enclosure.
- A literature pocket is provided for the inside of the door.

Finish

- Cover and enclosure are natural stainless steel with a smooth brushed finish.
- Removable inner panel is finished in white powder coating.


Accessories

- | | |
|---------------------------------|--------------------------------------|
| • Inner Panels | • Climate Control |
| • Blowers and Fans | • Ventilation |
| • Door Clamping Hardware | • Door Stop Kit |
| • Door Support Guide | • Drip Shield Kit |
| • Enclosure Stabilizers | • Floor Stand Kit |
| • Filtered Fans | • Heaters |
| • Lock kit | • Type 1 Louvered Ventilating Plates |
| • Wallmount Quick Release Clamp | • Terminal Kits |

9/13/2018

Type 4X Stainless Steel Wallmount Enclosure (1418 N4 SS Series) - Hammond Mfg.

- Temperature Controls and Accessories
- Window Kits
- Ground Wire Kits

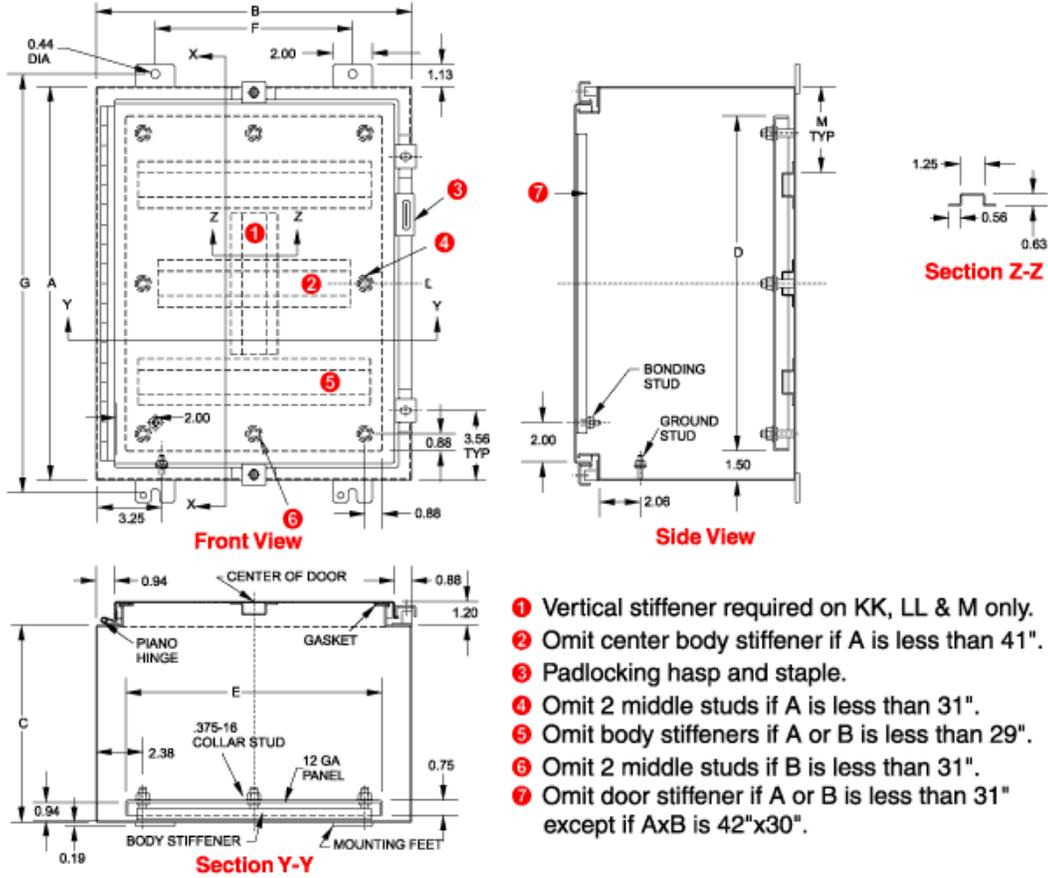

- ❶ Vertical stiffener required on KK, LL & M only.
- ❷ Omit center body stiffener if A is less than 41".
- ❸ Padlocking hasp and staple.
- ❹ Omit 2 middle studs if A is less than 31".
- ❺ Omit body stiffeners if A or B is less than 29".
- ❻ Omit 2 middle studs if B is less than 31".
- ❼ Omit door stiffener if A or B is less than 31" except if Ax B is 42"x30".

304 S.S. Part No.	316 S.S. Part No.	Panel Size					Mounting Centers	
		A	B	C	D	E	F	G
1418N4SSJ6	1418N4S16J6	24.00	24.00	6.00	21.00	21.00	18.00	25.25