


TPR WESTPOWER300-4 DC DIMMER PACK

Features:

- 4 Channel DMX/Manual LED Dimmer Pack
- 10 Amps/Channel (25 Amps maximum/pack)
- DMX-512 or Potentiometer adjustable
- ETL Listed
- Master/Slave control capability
- 1 Year Warranty
- Operated at 12VDC-24VDC
- Power Polarity Indicator
- Fuse protected circuitry
- LED Intensity Indicators
- No AC power source is required
- No ventilation required

Specifications:


MODEL	WESTPOWER 300-4
POWER*/CONTROL	*From TPR DC Power Supply
RATED POWER	300w/12v or 600w/24v
VOLTAGE RANGE	12-24VDC (See PS literature)
RATED CURRENT	10A/Channel 25A maximum/Pack
EXTERNAL DMX INPUT	RJ45 (Optional XLR)
WIRING OPTIONS	1/2" Knockouts (4) Bottom (1) Top
MOUNTING	(4) #6 Keyholes on back of unit Left/Right of circuit board
DIMENSIONS (LxWxD)	8.5" x 7.0" x 2.0"
WEIGHT	3lbs
MATERIAL/FINISH	Steel/Powder Coat Black
RATING & STANDARDS	ETL (3168550) UL2108 Designed for indoor usage
OPERATING TEMP RANGE	-20°~122°F or -28°~50°C w/5-95% non-condensing humidity

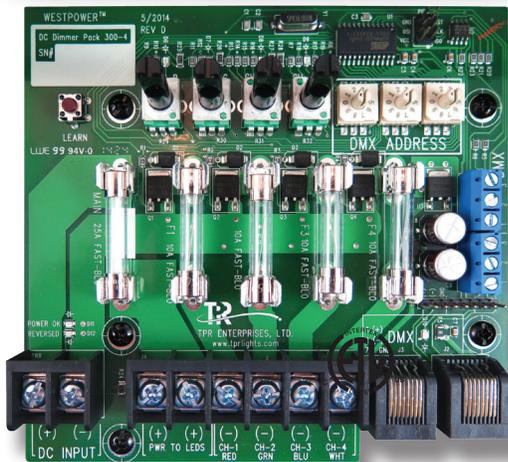

Typical Wiring Details:


- PS-## / PS-##-EC / -##-WP
See TPR power supply white sheets for more information
- WestPower300-4 (12/24VDC In-line Dimmer)
- Optional – DMX-512 Signal from Console, Wall Control or Other
- FL-SMD-4PIN-C or wiring by others**
- TRR LED Product
- FL-SMD-4PIN-J jumper or product lead**
- FL-SMD-MC-IP
- FL-SMD-MT-CLIP
- FL-SMD-MT

**Please note connectors are not available for RGBW 5-conductor.

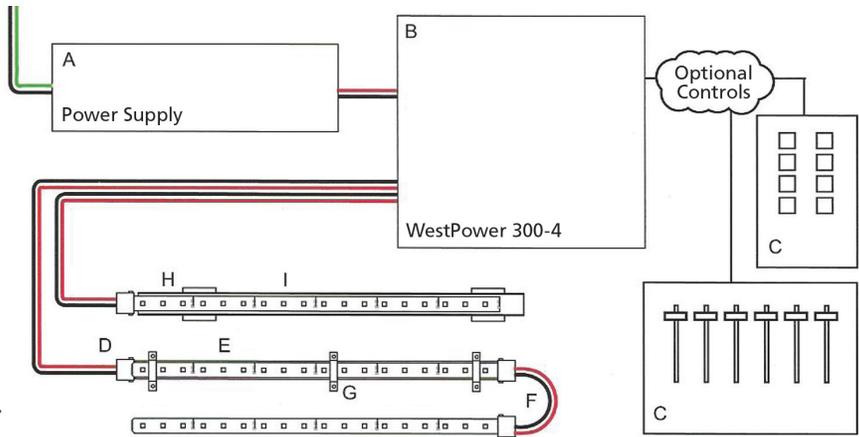

Ordering Logic:

DEVICE	MODEL	OPTIONS
WP	300-4	<blank>
WP-WestPower	300-4	<blank> – No Options XLR – Input & Output/Pass through 5 pin or 3 pin XLR Connectors SP – Special



Specifications are subject to change without notice.

