



The KLIK LEDpod XL™ is a low-voltage Class II luminaire which can be installed within hollow structural elements of buildings, façades, overhead walkway structures or any area requiring a robust recessed LED fixture with an IP65 rating and output to 750 lumens.

The key advantage of the KLIK LEDpod XL is the flexibility to install in flat and radiused profiles of any wall thickness with only a simple drilled hole. This eliminates external conduits and junction boxes, ensuring clean lines and beautiful aesthetics.



LEDpod XL28 Flat



LEDpod XL32 Flat





LEDpod XL50 Flat




www.klikusa.com



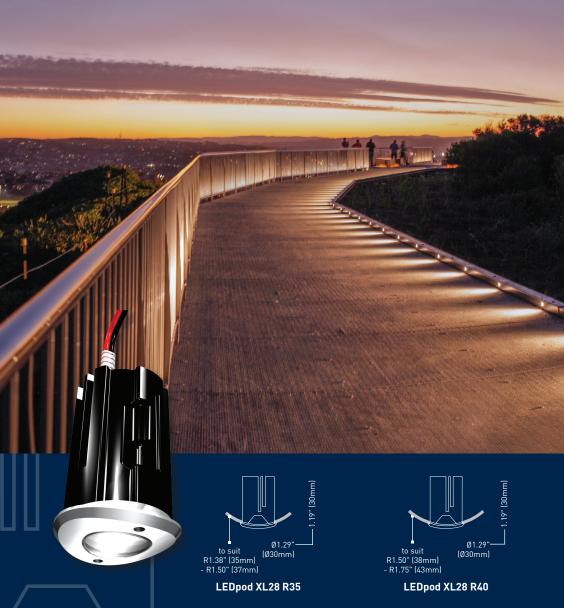





LEDpod XL32 R50



LEDpod XL50 R50



LEDpod XL32 R85



LEDpod XL50 R85



www.klikusa.com

Let's Create Something Together