


Universal NEMA4 LED Driver Junction Box

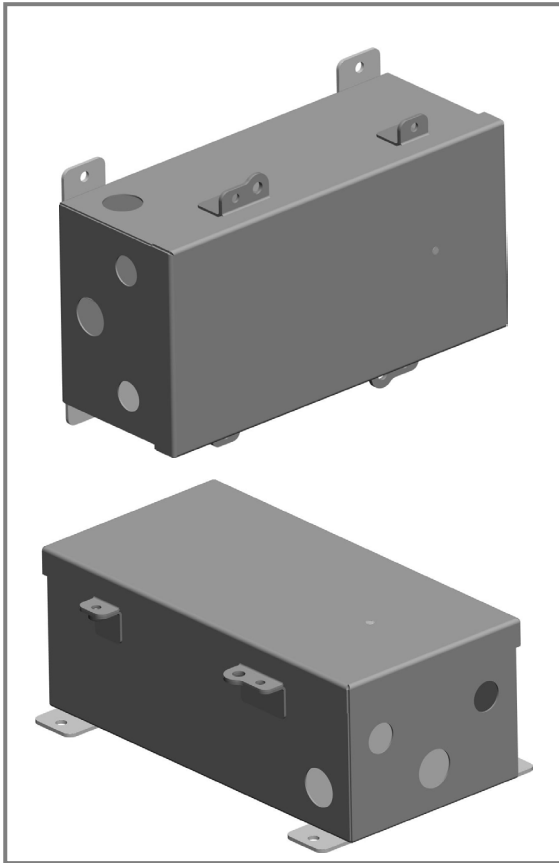

Application

- Designed to enclose **two** KLIK USA LED Drivers as well as supporting electrical connections in harsh industrial environments.
- High performance NEO Tek gaskets on the cover and hole plugs seals out water and dust, providing maximum outdoor protection from the elements. NEMA4 rated.
- The 100% stainless steel construction eliminates rust and corrosion.
- Pre-drilled holes (three $\frac{3}{4}$ conduit for LINE voltage and four $\frac{1}{2}$ conduit for LOW voltage) make wire and conduit installation fast and easy.
- Includes separator plates to isolate line voltage connections in bottom of enclosure and low voltage connections at top of enclosure
- Includes a modular mounting panel that accepts all KLIK USA LED Drivers, as well as several other brands. The thick aluminum construction acts as a heat sink to help pull heat from the drivers, as well as provide perfect ground path for case grounded construction.
- 100% removeable cover provides maximum convenience during installations and includes a bonding wire for ultimate safety.
- Dual oversized padlock loop for safe and secure locking
(SPECIFY IF LOCKING OPTION REQUIRED)

Standards

- UL 508A Type 3R, 4, 4X, & 6
- CSA Type 3R, 4, 4X & 6
- Complies with
 - NEMA Type #R, 4, 4X, & 6
 - IEC 60529, IP67


Construction

- Enclosure and cover formed from 16-gauge 304 stainless steel.
- Smooth, continuous robotic welded seams, strong and waterproof construction.
- NEO Tek seal for the cover and hole plug is made from proprietary neoprene foam.
- 14-gauge welded locking tabs and mounting brackets for safe and rigid installation.
- 1/8" thick aluminum modular mounting panel.
- Larger 1/4"-20 cover screws make field installations easier, reducing loss do to drops.
- Includes either SS NEMA4 plug to seal up unused holes.
- A bonding stud is provided on the cover, and a grounding stud is provided in the enclosure.
- Grounding & bonding wires and hardware are provided.


Compatible Drivers & Accessories

- Capable with the following KLIKUSA Drivers
 - LP096WPTRNDIM
 - LP096WDIMIP67
 - LP100WPTRNDIM
- Accessory hole plugs
- Adaptor plate for padlock

Engineered for Installers

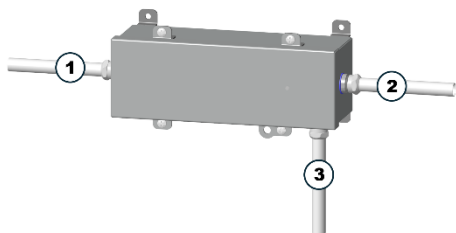

The Universal Enclosure simplifies large LED light installation by providing strategically placed NEMA conduit holes for quick and fast installs without the need to drill holes!

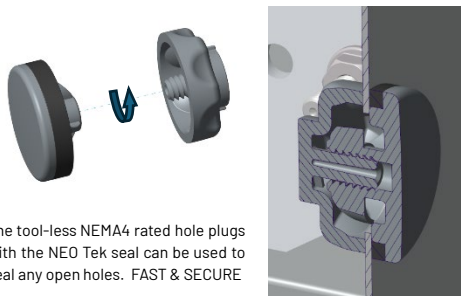

IP67 rated plugss shipped with enclosure

Specifications

